

SL100

1" Snap Lock Panel


PRODUCT DESCRIPTION

- Low-Profile Architectural Standing Seam Metal Roofing System
- Ideal for residential and light commercial applications
- Specially designed clip allows thermal movement
- Tested panel for rated assemblies achieves higher performance levels

1" Snap Lock Panel; max width 16.89"; Snap Lock Seam fastened with (2) #10-12 x 1" long No. 2 Phillips drive pancake head, wood screws; One Part Clip Assembly SL100R Clip fastening metal to panel to minimum 15/32" plywood decking; maximum 24" clip spacing; Panel Rollformer: Schleich Quadro-Plus Rollformer; Maximum Allowable Roof Uplift Pressure (steel): -67.3 psf Main Field @ 24" Clip Spacing; Perimeter and Corner Pressure -131.0 psf @ 6" Clip Spacing; *Oil Canning is not a Cause for Rejection.*



www.4mmetals.com

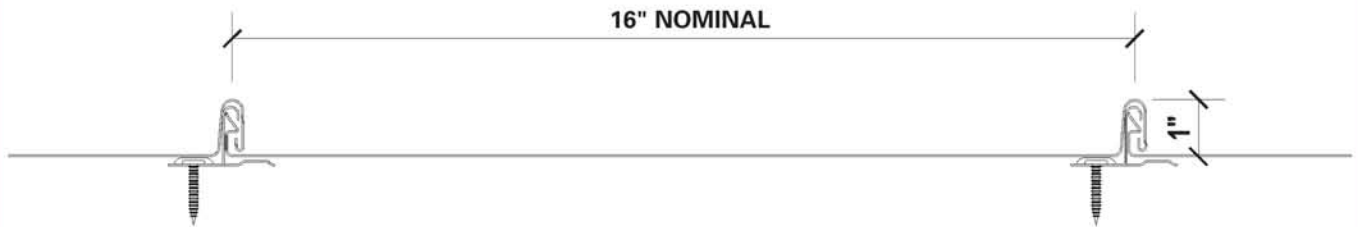

DESIGN INFORMATION

- Minimum Slope = 3":12"
- Actual Panel Width: 16.89" from 20" Coil
- Solid Substrate Required
- Architectural, Hydrokinetic Panel
- Snap Seam – No Field Seaming Required
- 24 and 26 Gauge Galvalume®
- .032" Aluminum
- 16oz Copper
- 30Year Finish Warranty on Kynar 500 Finish
- WeatherTight Warranty Not Available
- Underlayment Required

TEST REPORT SUMMARY

- Florida Building Code 2007
- Chapter 15: Roof Assemblies
- Section 1504.3.2; 1505.3; 1507.4
- Chapter 16: Structural Design
- Chapter 22: Steel; Section 2209 Cold Form Steel
- Chapter 23: Wood
- Testing per TAS 125-03 Std. Requirements for Metal Roof Systems
- Test Assembly #6 by Underwriters Laboratory for:
 - a) UL 580-94, per FBC, Uplift Resistance of Roof Assemblies
 - b) UL 1897-98, per FBC, Uplift Tests for Roof Covering Systems
- Testing per TAS 100 Wind Driven Rain Test
- FPA #9860.14-R1 – HVHZ – 24ga